



XENNiA® Amethyst

Reactive ink for Kyocera



working for you.

Product Profile:

Xennia Amethyst is a series of water-based inks developed to offer high performance for direct printing onto cotton, viscose, silk and cellulosic substrates.

The Xennia Amethyst series is suitable for most printers using Kyocera piezo printheads (e.g. systems from MS Dover, EFI Reggiani, Atexco - the suitability of the inks for individual machines and models needs however to be validated by the user)

Typical characteristics and features include:

- Superior color quality and performance
- Excellent printhead lifetime
- Fully compatible MCT dye set
- Certified for GOTS


Ink Installation: Unless Xennia Amethyst is the first ink installed into the system, it is recommended to clean the ink line thoroughly using a recommended flush.

Printing: Before printing, fabrics should be pre-treated for reactive dye fixation, recommended process is available. For optimal printing, the relative humidity rate must be kept at 50% or higher and the atmospheric temperature set to 20-25°C (70°F). After printing the fabric should be dried below 110°C before steaming.

If the inks dry in the nozzles, the normal cleaning procedure built into the printer should be applied. It is recommended to use Universal Flush WB first.

Fixation: To fix the print, the printed fabric should be steamed at high humidity at 100-104°C for about 8-10 minutes with subsequent wash-off (washing recommendations available)

Available Inks:

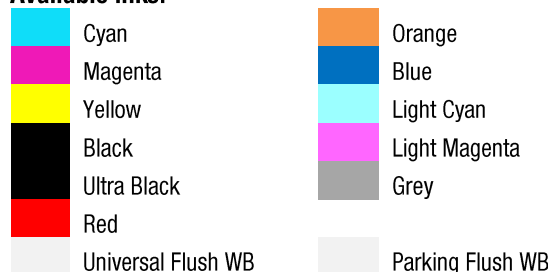

Xennia Amethyst inks are available in a standard pack size of 10kg

Storage Considerations: Inks should be stored in a controlled environment at a temperature between 10-30°C. If stored under these recommended conditions, the inks have a shelf life of 12 (twelve) months.

Safety, Health and Environment: Xennia Amethyst inks should be used in accordance with normal standards of industrial hygiene and good manufacturing practice. Please refer to the Safety Data Sheet for specific information.

Fastness: Substrate: 240 g/m², 100 % viscose, Printing resolution: 600 dpi, steamed at 102°C 8 minutes. All fastness properties measured at 100% coverage.

Product	Light	Water	Washing	Persp.	Persp.	Rubbing	Rubbing
Xennia Amethyst	ISO 105 /B02	(severe) ISO 105 /E01 C4-5h4-5./st.	(60°C) ISO 105 /C06 ch./st.	(acid) ISO 105 /E04 ch./st.	(alkali) ISO 105 /E04 ch./st.	(dry) ISO 105 /X12	(wet) ISO 105 /X12
Cyan	>6	4/4-5	4-5/4	3-4/4-5	4/4-5	4-5	4-5
Magenta	5	4/4-5	4-5/4	3-4/5	4/5	4-5	4
Yellow	>6	4-5/5	5/4	4-5/4-5	5/5	4-5	4-5
Black	6	4/5	4-5/4	4/4-5	5/5	4-5	4-5
Red	5	4/4-5	5/4	4-5/4-5	5/4-5	4-5	4
Orange	>6	4-5/5	4-5/4	4/4-5	4-5/4-5	4-5	4
Blue	5-6	4-5/4-5	5/4	4/5	5/5	4-5	4-5
Grey	4	4-5/4-5	3-4/4	4-5/4	4/4-5	5	5
Ultra Black	>6	4/5	4-5/4	4/4-5	5/5	4-5	4-5
Light Cyan	4-5	4/4-5	4-5/4	3-4/4-5	4/4-5	4-5	4-5
Light magenta	4-5	4/4-5	4-5/4	3-4/5	4/5	4-5	4

Although the information presented here is believed to be reliable, Sun Chemical Corporation makes no representation or guarantee to its accuracy, completeness or reliability of the information. All recommendations and suggestions are made without guarantee, since the conditions of use are beyond our control. There is no implied warranty of merchantability or fitness for purpose of the product or products described herein. In no event shall Sun Chemical Corporation be liable for damages of any nature arising out of the use or reliance upon the information. Sun Chemical Corporation expressly disclaims that the use of any material referenced herein, either alone or in combination with other materials, shall be free of rightful claim of any third party including a claim of infringement. The observance of all legal regulations and patents is the responsibility of the user.

SUNCHEMICAL, and Xennia are either registered trademarks or trademarks of Sun Chemical Corporation in the United States and/or other countries. DIC is a trademark of DIC Corporation, registered in the United States and/or other countries. Copyright © 2020 Sun Chemical Corporation. All rights reserved.

Sun Chemical Ltd.
Norton Hill
Midsomer Norton
BA3 4RT
United Kingdom
Tel: +44 (0)1761 414471

**Sun Chemical Advanced
Materials SA**
ZI Riond Bosson 8
Morges
CH-1110, Switzerland
Tel: +41 21 811 2300

Sun Chemical US
35 Waterview Boulevard
Parsippany
NJ 07934
Tel: +1 0973 404 6600