














DirectTex® Artist Mambo®

Fields of application

.01 .02 .04 .05 .07

Specifications

| | |
|---|---|
|  | REF. 564160 137 |
|  | 100 % polyester weave fabrics PVC-free, recyclable |
|  | ca. 160/ 252/ 320/ 505 cm ca. 63/ 99/ 126/ 199 inch other widths available on request |
|  | B-s1, d0 DIN EN 13501-1 |
|  | ca. 170 g/m ² ca. 5.0 oz/yd ² |
|  | ca. 0.25 mm ca. 250 µm |
|  | rolls 50/ 100 m 55/ 109 yd |
|  | coated side: 7 uncoated side: 6-7 DIN EN ISO 105-B02 |
|  | warp: 1314.1 N weft: 1238.6 N DIN EN ISO 13934-1 |
|  | warp: 27.9 % weft: 32.6 % DIN EN ISO 13934-1 |
|  | warp: 0.8 % weft: 1.6 % DIN EN 14704-1 |
|  | cold, heat, ultrasonic cut |
|  | direct light |

Printing methods

| | | | |
|---------|----|-------|--------|
| print | UV | Latex | Dyesub |
| Inside | • | | |
| Outside | | | • |

Article shrinkage (50 sec hold up time)

| | shrinkage in cross direction | shrinkage in longitudinal direction | recommended fixing temperature |
|-------|---------------------------------|--|-----------------------------------|
| 180°C | 0,7 % | 1,5 % | • |
| 190°C | 0,8 % | 1,8 % | |
| 200°C | 1,2 % | 2,7 % | |
| 210°C | 1,3 % | 2,8 % | |

Certifications






DirectTex® Artist Mambo

Fields of application

.01 .02 .04 .05 .07

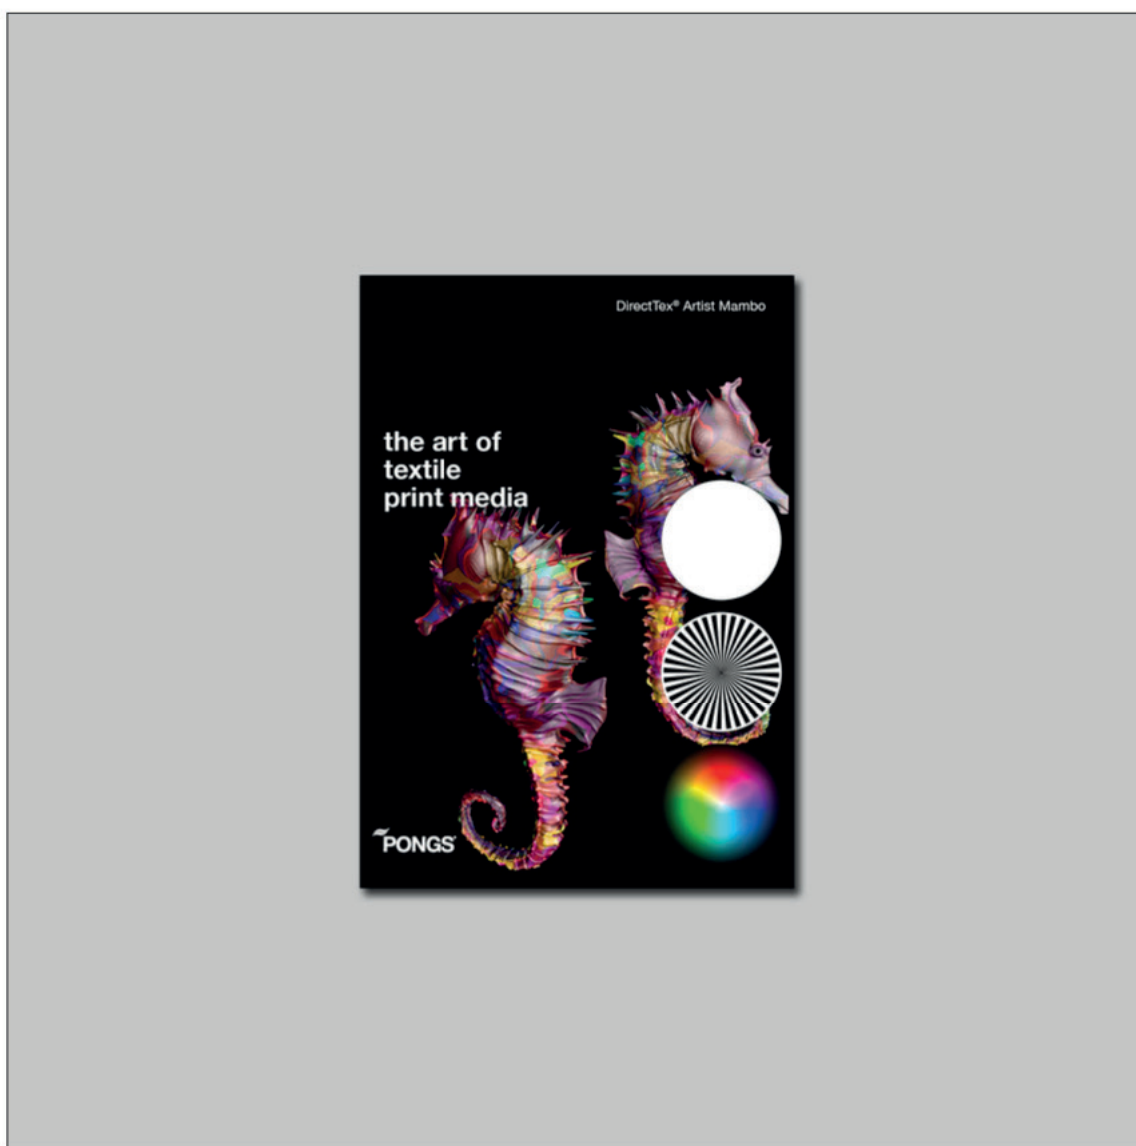

Ref.-Nr.: 564160 137 | Preview print sample



PONGS Technical Textiles GmbH

Bahnhofstraße 21
07919 Pausa-Mühltroff
Germany

Phone +49 36645 350-0
salestt@pongs.de
www.pongs.com

We reserve the right for technical modifications.
The above mentioned details are non-binding.
A tolerance of $\pm 5\%$ is valid. Effective: 2019/06